

XS-IPB225-4PS-FC-AI-BLACK

Bullet IP Camera 4 Megapixel BLACK

1/3" Progressive Scan CMOS


Compression

H.265+/H.265/H.264+/H.264

Lens 2.8 mm / LEDs Range 30 m

WDR | Integrated microphone

Smart Features

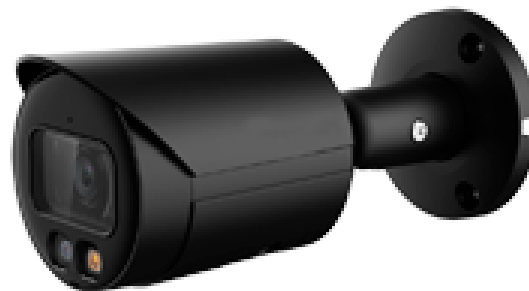

X-Security

IP Bullet Camera

PRO Range

1/3" Progressive CMOS

4 Megapixel (2688x1520)

2.8 mm Lens

Full-Color Starlight

0.008 Lux

IR/WL range 30 m

IVS Perimeter protection

Intelligent search

Compression H.265+/H.265/H.264+/H.264

RJ-45 10/100 BaseT

PoE IEEE802.3af

Weatherproof IP67

Built-in microphone

WDR

3D DNR

IR Cut

SD card recording

WEB Interface, CMS (DSS/ PSS), Smartphone and NVR

ONVIF Compatible

Black colour

Specifications

| | |
|----------------------------|--|
| Brand | X-SECURITY |
| Image sensor | 1/3" Progressive CMOS |
| Maximum resolution | 4 Megapixel (2688x1520) |
| Main Stream rate | 2688x1520 (1~20fps), 2560x1440 (1~25/30fps) |
| Extra Stream rate | 704x576 (1~25fps), 704x480 (1~20/30fps) |
| Compression | H.265+/H.265/H.264+/H.264 |
| Lens | 2.8 mm (H: 95°; V: 52°; D: 114°) |
| Infrared lighting | 0.008 Lux / LEDs (30 m) |
| Image improvements | WDR, BLC, HLC, AWB, AGC, 3D-DNR, SMD |
| IVS (Perimeter protection) | Intrusion, tripwire (both functions support the accurate classification and detection of vehicles and persons) |
| Network interface | Ethernet 10/100 BaseT |
| Audio | Integrated microphone |
| Remote access | WEB, CMS (DSS/PSS), Smartphone and NVR interface |
| Interoperability | ONVIF |
| Power | DC 12 V / 2,5 W, PoE IEEE802.3af |
| Temp. operation | -40° C ~ +60° C |
| Internal memory | Micro SD Max 256GB |
| Degree of protection | Weatherproof IP67 |
| Dimensions | 70 (Ø) x 166.2 (h) mm |
| Weight | 480 g |