

SF-XVR3108-HG

Safire Smart

XVR analog recorder 3 series

8CH HDTVI/HDCVI/AHD/CVBS/ 8+2


IP

HDMI Full HD and VGA output / 1

HDD

1080P Lite (25FPS)

Audio

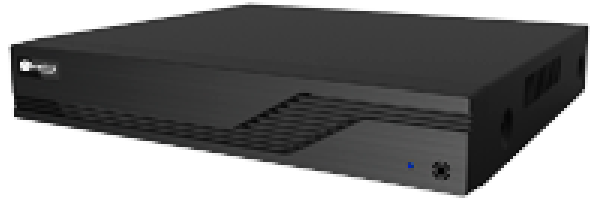

Safire Smart

XVR 5n1

8 CH video HDTVI/HDCVI/AHD/CVBS / 8+2 IP

H.265/H.264

Resolution 1080P Lite (25FPS)

Audio

Full HD HDMI and VGA Output

Space for 1 HDD

Mouse

Specifications

Brand	Safire Smart
Video format	HDTVI / HDCVI / AHD / CVBS / IP
Video inputs	8 Channels BNC (HDTVI / HDCVI / AHD / CVBS)
Hybrid configuration	Default: 8 Channels from BNC and 8 (substitution) +2 (extra) IP channels (up to 5Mpx)
Video outputs	1 HDMI Full HD, 1 VGA
Audio inputs	1 Channel RCA
Audio outputs	1 Channel RCA
Bidirectional audio	Reusing the audio input/output
Video / audio compression	H.265 / H.264
Display resolution	HDMI x 1 : 1920 x 1080 / 1280 x 1024 / 1024 x 768 VGA x 1 : 1920 x 1080 / 1280 x 1024 / 1024 x 768
BNC input resolution	TVI/AHD/CVI:1080P/1080P Lite/720P/720P Lite/WD1
Main Stream coding	Channel 1: 1080P Lite/720P/WD1: 25fps (PAL)/30fps (NTSC) Other channels: 1080P Lite/720P/WD1: 12fps (PAL)/15fps (NTSC) 720PLite: 25fps(PAL) / 30fps(NTSC) IP channel: 25fps(PAL) / 30fps (NTSC)
Simultaneous multifunction	Pentaplex: Live, Recording, Playback, Backup and Remote Access
Bit Rate	32Kbps ~4Mbps
Bandwidth	16 Mbps (Incoming) / 60 Mbps (Outgoing)
Alarms	No
Recording method	Manual, programmed, exception, motion, intelligent events
Backup	USB / Network
Internal memory	1 HDD SATA 3.5" of up to 8TB (not included)
Communication	2 x USB 2.0 (Mouse and backup) / RJ45 10/100M(Ethernet) [%VAR%]
Remote access	Web Browser, Safire Smartphone App and Safire Smart VMS software
Power	DC 12 V / 1.5 A (Consumption without HDD)
Dimensions	42 (H) x 255 (W) x 222 (D) mm